DERWENT FLOW CONTROL

avfi

ARV-1-K

KINETIC AIR RELEASE VALVE DN25

The ARV-1-K is a kinetic air release valve. Its function is to allow air to be expelled from the pipeline during filling, and air to be admitted into the pipeline during emptying.

FEATURES

- Designed to extract air from pipes, large filters, tanks or any other similar equipment which must work without the presence of air.
- Due to its design, the valve is totally sealed, even at very low pressures.
- Due to its exclusive internal design, the float is not affected by the air stream. Only water will shut the valve.
- Its neck features a built-in filter to prevent objects from getting into the valve through the outlet.
- The Valve is UV Stable.

APPLICATIONS

Vents air from the pipes as they fill. When the water reaches the valve, the float rises, closing the discharge hole.

It prevents the pipeline collapsing by allowing air to be drawn in through the valve.

TECHNICAL DATA

Pressure Classes	PN16	
Maximum working Pressure	16 Bar (232 PSI)	
Temperature Range	0°C to 80°C	
Connection	25mm Male BSP	25mm Male NPT
Volume of Air Extracted	130m³/h at 0.4 bar	
Inlet Size	25mm	
Outlet Size	20mm	
Weight	0.34kg	
Height	196mm	
Width	80mm	

240124

® Copyright by Derwent Industries Pty Ltd Derwent Industries reserves the right to change product designs and specifications without notice E & O.E

ARV-1-K
KINETIC AIR RELEASE VALVE

MATERIAL SPECIFICATIONS & PARTS LIST

NO.	DESCRIPTION	MATERIAL
1	Base	Fibreglass-Reinforced Polyamide
2	Body	Fibreglass-Reinforced Polyamide
3	Float	Polypropylene
4 *	Seal	EPDM
5 *	O Ring	NBR

* Spare Parts

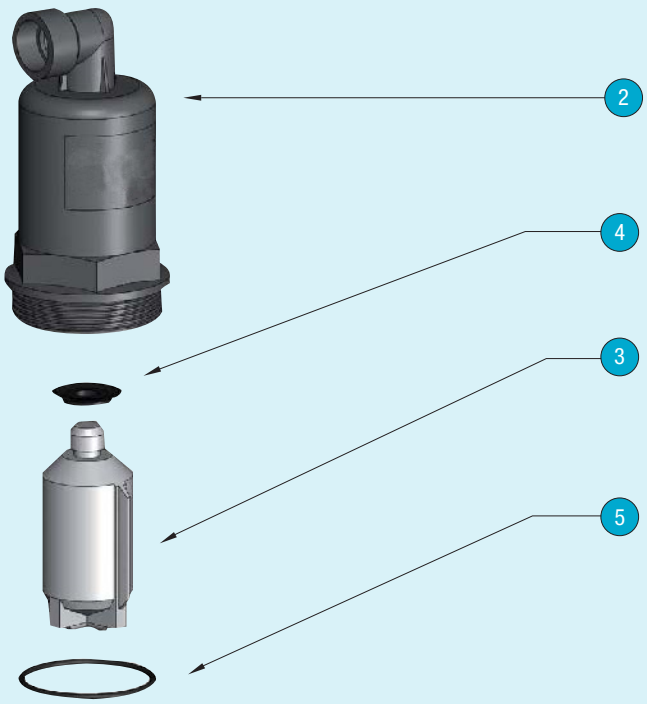

BSP/NPT Base

INSTALLATION

- For correct operation, the valve should always be in a vertical position.
- It is recommended to install a manual ball valve under the ARV, in order to make maintenance and repair operations easier without shutting the whole system.
- For correct operation, valves must undergo regular routine checks. The check should include the cleaning of the internal components and inspection of the seal conditions.

AIR INFLOW & OUTFLOW

Air **OUTFLOW** Main Seal

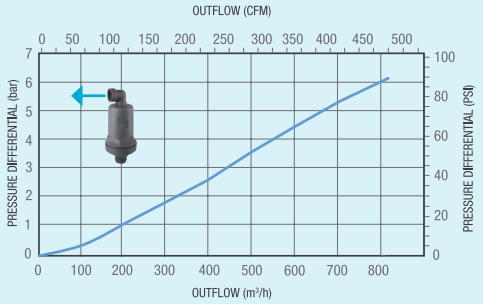

Air **INFLOW** Main Seal

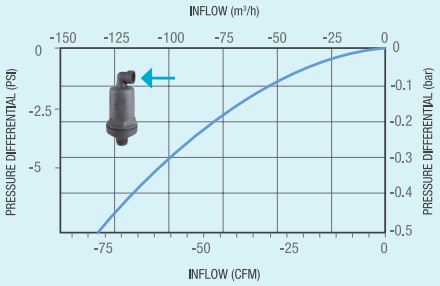

54 Enterprise Drive, Bundoora, VIC, 3083
p. 1300 789 256 | **e.** sales@avfi.com.au
avfi.com.au

Designs, material and specifications shown are subject to change without notice due to our continuing program of product development.

All content is protected by Copyright and is owned and/or licensed by AVFI Pty Ltd. Copyright© AVFI Pty Ltd